

# Self-operated Pressure Regulators



## Pressure Reducing Valve Type 50 ES and 50 EM

### Application

Pressure regulators for set points from **0.2 to 10 bar** · Valve sizes **G 3/8** and **G 1/2** · Nominal pressure **PN 16** · Suitable for water and other liquids, air and non-flammable gases up to **50 °C**

The valve closes when the downstream pressure rises.

The regulators consist of a valve, a spring-loaded operating diaphragm and a set point adjuster.

### Special features

- Low-maintenance proportional regulators requiring no auxiliary energy
- Wide set point range and easy set point adjustment
- Tight-closing, spring-loaded, single-seated valve, which can be used for upstream pressures up to 16 bar
- Suitable for media that do not affect the operating diaphragm and do not cause the materials used to corrode

### Versions

**Type 50 ES** (Fig. 1) · Suitable for water, air and other liquids and gases · With valve in **G 3/8** or **G 1/2** · Set point ranges 0.2 to 4, 2.5 to 6 or 4 to 10 bar.

**Type 50 EM** (Fig. 2) · Design same as Type 50 ES, but with connections for attaching a pressure gauge (Ø 63 mm housing, G 1/4 connection) to indicate the downstream pressure.

**Accessories** · Pressure gauge with **G 1/4** connection and Ø 63 mm housing, scale division for ranges of 0 to 4, 0 to 6, 0 to 16 bar.

**Special version** · Operating diaphragm made of nitrile rubber (NBR) for handling heating oil.

**Table 1 · Technical data** · All pressures in bar (gauge)

Type	50 ES and 50 EM	
Thread size	G 3/8	G 1/2
Kvs coefficient	0.93	
Max. perm. upstream pressure	16 bar	
Max. perm. temperature	50 °C	
Set point range in bar	Continuously adjustable 0.2 to 4; 2.5 to 6; 4 to 10	
<b>Materials</b> · Material numbers acc. to DIN EN		
Body, seat	CW617N (brass)	
Plug	Stainless steel 1.4104 with NBR soft sealing	
Diaphragm	CR <sup>1)</sup>	

<sup>1)</sup> With special version for oils (ASTM I, II, III): NBR



Fig. 1 · Type 50 ES




Fig. 2 · Options for pressure gauge attachment with Type 50 EM

### Principle of operation

The plug connection link (6) connects the operating diaphragm (4) and the valve plug (8). The downstream pressure to be maintained at a constant pressure produces a force on the operating diaphragm (4), which is used to adjust the valve plug (8) as a function of the adjusted set point.

### Installation

- The valves may be installed in any desired position
- Direction of flow as indicated by the arrow on the valve body

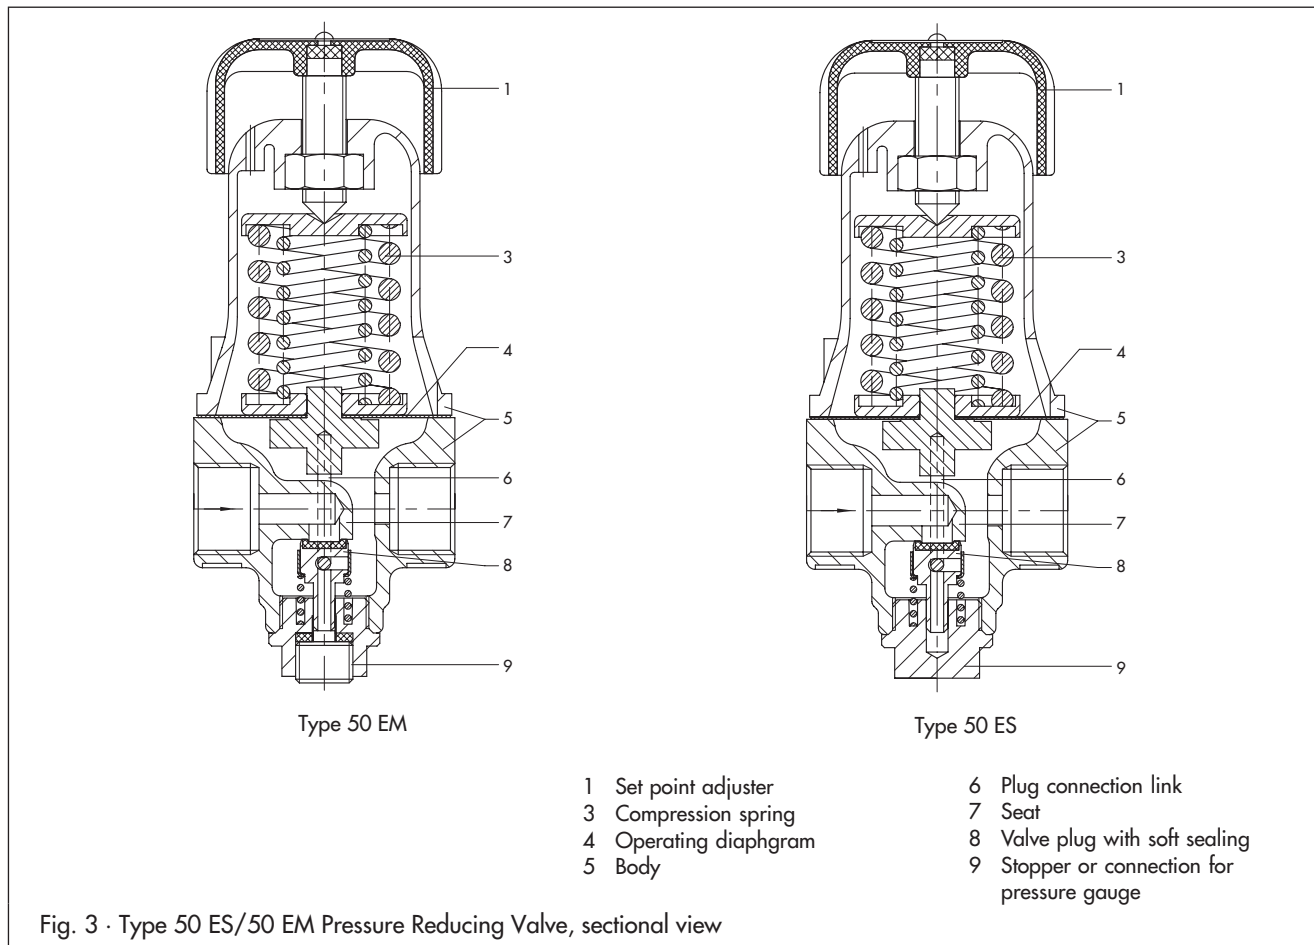

- |                       |  |
|-----------------------|--|
| 1 Set point adjuster  | 6 Plug connection link                     |
| 3 Compression spring  | 7 Seat                                     |
| 4 Operating diaphragm | 8 Valve plug with soft sealing             |
| 5 Body                | 9 Stopper or connection for pressure gauge |

Fig. 3 · Type 50 ES/50 EM Pressure Reducing Valve, sectional view

Table 2 · Dimensions in mm and weights

Type	50 ES and 50 EM	
	G 3/8	G 1/2
Length L	60	
Height H1	113	
Height H2	37	
Weight, approx. in kg	0.7	

### Ordering text

Pressure Reducing Valves Type 50 ES or Type 50 EM

Thread size G ..., set point range ... bar

Pressure gauge  $\varnothing$  63 mm, G 1/4

- 0 to 4 bar 8520-0111
- 0 to 6 bar 8520-0119
- 0 to 16 bar 8520-0134

Optionally, special version ...

Optionally, accessories ...

Specifications subject to change without notice.

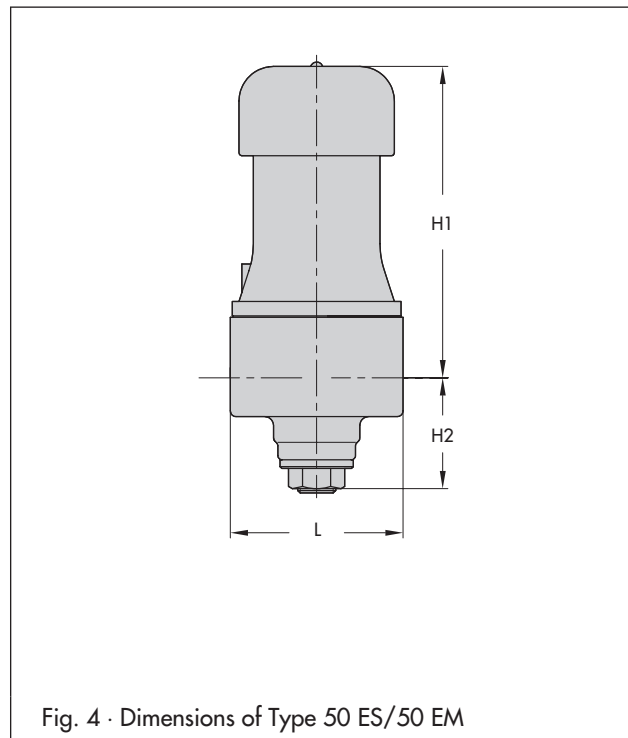


Fig. 4 · Dimensions of Type 50 ES/50 EM

