

Type 2404-1 Pressure Reducing Valve with Pilot Valve for small set point ranges

Application

Pressure reducing valve for set points from **0.045 to 1.5 psi** (3 to 100 mbar) · Nominal size **NPS 1 to 6** (DN 25 to 150)
Class 125, 150 and 300 (PN 16 to 40) · Suitable for gases at temperatures from **-5 to 195 °F** (-20 to +90 °C)



The pilot-operated Type 2404-1 Pressure Reducing Valve is preferably used for the precise control of inert gas in tank blanketing applications. The inert gas (usually nitrogen) is applied to protect the product inside the tank from reacting with the ambient atmosphere.

The Type 2404-1 Pressure Reducing Valve regulates the excess pressure of the inert gas to a constant pressure within the millibar range.

The pressure regulator ensures that the pressure in the tank remains constant during pumpout operations. Furthermore, adverse weather conditions, e.g. a sudden temperature drop, can affect the pressure inside the tank. In both cases, inert gas flows into the tank until the pressure reaches adjusted set point.

Special features

- Low-maintenance proportional regulator
- Pilot control provides excellent control accuracy
- Internal set point springs
- Soft-seat plug provides bubble-tight shut-off performance
- Meets strict emission requirements (TA Luft)
- Suitable for sour gas service (NACE)

Versions

The Type 2404-1 Pressure Reducing Valve is a pilot-operated regulator.

The regulator consists of the following components:

Type 2406 functioning as the main valve

NPS 1 to 6 (DN 25 to 150), balanced by a diaphragm

Type 2405 functioning as a pilot valve

½ NPT female thread, C_v 1.2 (K_{vs} 1)

Type 2441 as input pressure regulator with NPT female thread, C_v 1.2 (K_{vs} 1)

Mounting kit M2404-1, consisting of:

Hook-up, needle valves etc.



Fig. 1: Type 2404-1

Special versions

Version with FDA-compliant materials for the food processing and pharmaceutical industries · Versions for sour gas service (NACE) · Actuator of pilot valve with seal and leakage line connection (e.g. for flammable gases)

Principle of operation

The Type 2404-1 Pressure Reducing Valve is a pilot-operated regulator. It regulates the supply pressure of the inert gas within the millibar range to a low pressure, creating a constant blanketing of the product inside the tank.


The following components interact to regulate the pressure of the inert gas.

The input pressure regulator (3) is delivered ready-adjusted. It reduces the upstream pressure p_1 to the input pressure p_e for the pilot valve (2) to approx. 1 bar (positive pressure), ensuring precise pressure control even at varying upstream pressures. The pilot valve governs the control pressure p_s for the main valve (1) and corrects the set point pressure.

The needle valve (4) is delivered ready-adjusted and lead-sealed.


If the pressure in the tank drops slightly below the set point pressure, for example due to the product being withdrawn from the tank, the pilot valve (2) is opened by the preloaded set point spring (2.1). As a result, the control pressure p_s acting on the actuator diaphragm (1.3) of the main valve (1) increases. The main valve opens, causing the inert gas to flow into the tank until the inert gas blanket is re-established or the set point pressure is reached again.

When the pressure in the tank increases constantly, for example during filling, the pressure in the actuator chamber (1.2/2.2) of the pilot valve and main valve increases. The pilot valve (2) closes when the pressure increases above the pressure set point. The control pressure p_s does not have any effect in this case. The main valve is closed by the actuator springs (1.1) and the increased inert gas pressure p_2 .

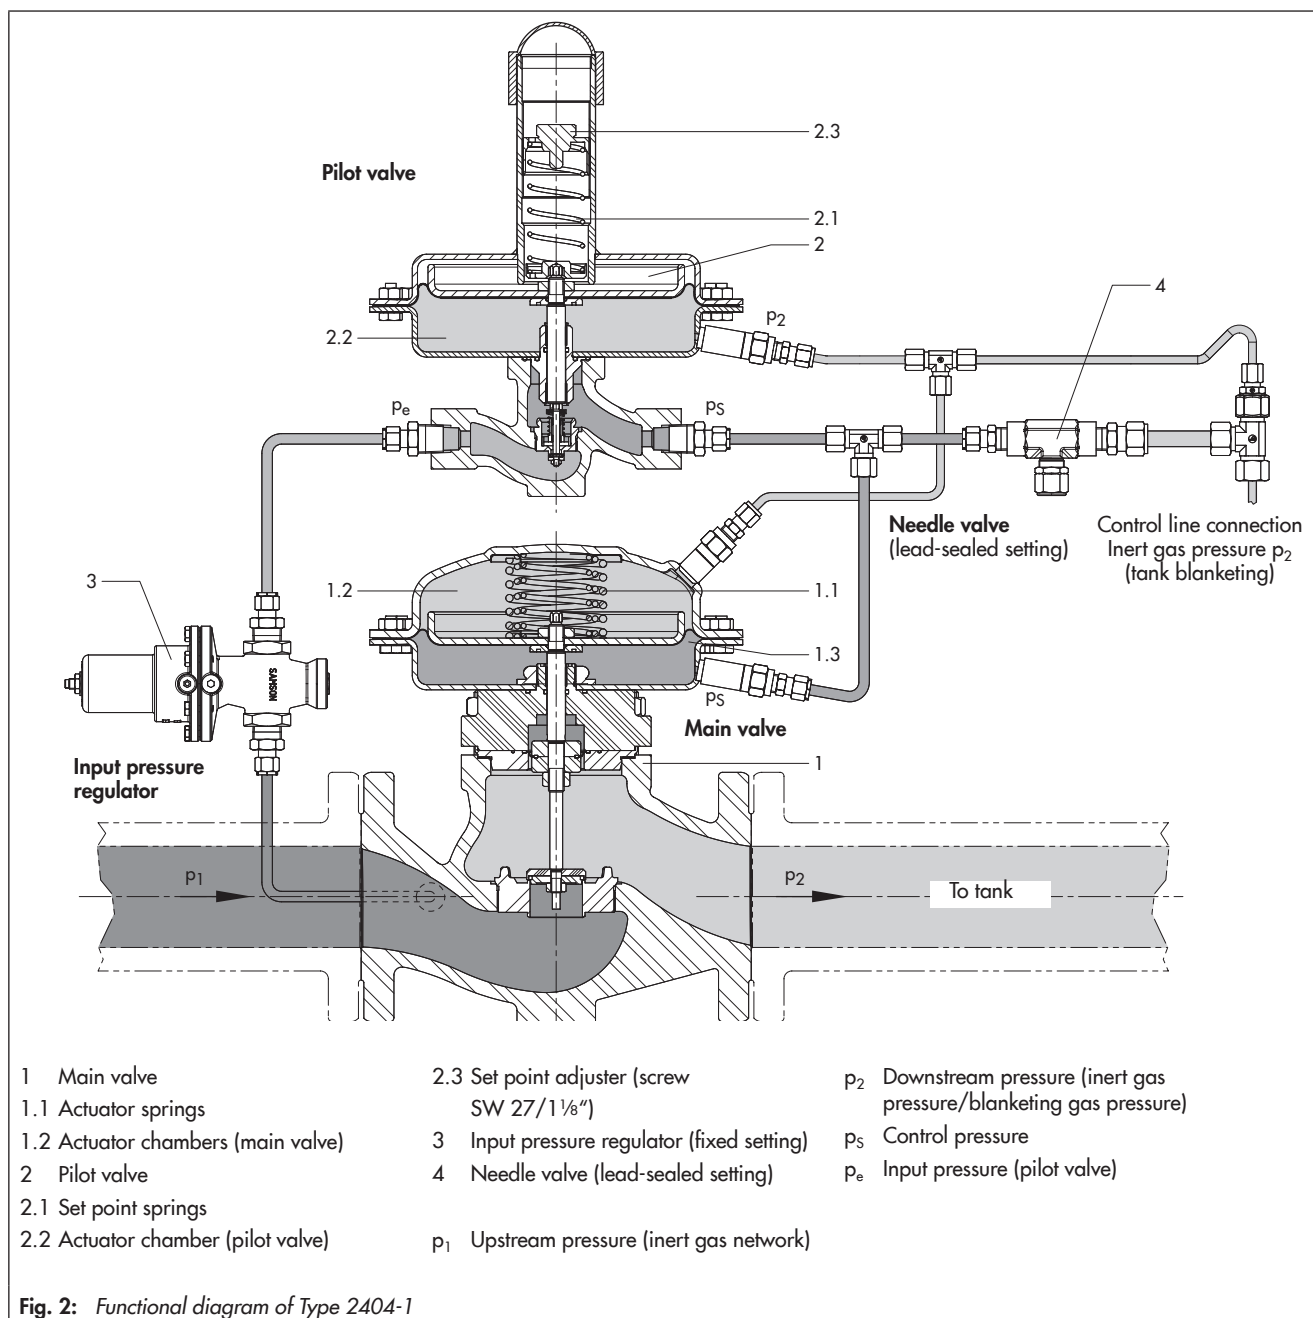

Technical data

Table 1: Type 2404-1 Pressure Reducing Valve

Type 2406 as main valve, balanced by a diaphragm							
Valve size ⁴⁾	NPS 1 DN 25	NPS 1½ DN 40	NPS 2 DN 50	NPS 2½ DN 65	NPS 3 DN 80	NPS 4 DN 100	NPS 6 DN 150
Pressure rating	Class 125, 150 and 300 · PN 16 to 40						
C _v coefficients	9.4	23	37	60	94	145	450
K _{vS} coefficients	8	20	32	50	80	125	380
Reduced C _v coefficient	–	7.5 · 9.4		23 · 37	37 · 60	60	–
Reduced K _{vS} coefficient	–	6.3 · 8		20 · 32	32 · 50	50	–
C _v with flow divider ¹⁾	–	–		30 · 45	30 · 70	45 · 110	335
K _{vS} with flow divider ¹⁾	–	–		25 · 38	25 · 60	38 · 95	285
Set point ranges	0.045 to 0.15 psi · 0.075 to 0.45 psi · 0.35 to 1.5 psi 3 to 10 mbar · 5 to 30 mbar · 25 to 100 mbar						
Actuator area	50 in ² · 320 cm ²						
Leakage class according to ANSI/FCI 70-2 or IEC 60534-4	Soft-seated, minimum Class IV						
Max. perm. differential pressure	175 psi · 12 bar ²⁾						
Min. differential pressure Δp _{min}	15 psi · 1 bar						
Perm. temperature	–5 to +195 °F · –20 to +90 °C ³⁾						
Compliance							


¹⁾ Reduced C_v/K_{vS} coefficients with flow divider on request

²⁾ Higher pressures on request

³⁾ Max. 175 °F/80 °C for EPDM and NBR versions

⁴⁾ DN 32 and 125 available on request

Table 2: Type 2405 functioning as a pilot valve

Type 2405 functioning as a pilot valve			
Connection	½ NPT female thread		
Nominal pressure	Class 300		
C _v coefficient	1.2		
K _{vS} coefficient	1		
Set point ranges	0.045 to 0.15 psi 3 to 10 mbar	0.075 to 0.45 psi 5 to 30 mbar	0.35 to 1.5 psi 25 to 100 mbar
Actuator area	100 in ² · 640 cm ²	50 in ² · 320 cm ²	50 in ² · 320 cm ²
Input pressure p _e	Fixed setting by input pressure regulator, min. 15 psi · min. 1 bar		
Perm. temperature	–5 to +195 °F · –20 to +90 °C ¹⁾		
Compliance			

¹⁾ Max. 175 °F/80 °C for EPDM and NBR versions

Table 3: Materials · Material numbers according to ASTM and DIN EN

Type 2406 functioning as the main valve	
Body	A126B, A216 WCC, A351 CF8M · EN-JL1040, 1.0619, 1.4408
Valve seat	316L ¹⁾
Plug	316L ¹⁾
Plug seal	EPDM · NBR · FKM
Operating diaphragm, balancing diaphragm	EPDM · NBR ²⁾ · FKM
Internal parts, guiding parts	316L
Diaphragm cases	1.0332 (1.4301/stainless steel body)
Actuator springs	1.4310 ³⁾

¹⁾ NPS 6 (DN 150): CF3M (1.4409)

²⁾ Not for NPS 2½, 3 and 4 (DN 65, 80 and 100)

3) Versions for sour gas service (NACE): Hastelloy

Type 2405 functioning as a pilot valve	
Pilot valve	Type 2405 ¹⁾
Body	A216 WCC ²⁾
Valve seat	316L
Plug	316L
Plug seal	EPDM · NBR · FKM
Operating diaphragm	EPDM · NBR · FKM
Internal parts, guiding parts	316L
Set point spring	1.4310
Mounting kit	
Piping	Stainless steel
NPT screw fittings	316L
Needle valve, input pressure regulator (Type 2441)	316L

¹⁾ Version for sour gas service (NACE) possible

²⁾ A351 CF8M on request

Table 4: Dimensions and weights

Type 2404-1	NPS 1/DN 25	-/DN 32	NPS 1½/DN 40	NPS 2/DN 50	NPS 2½/DN 65
L1 Class 150	7.25"/184 mm	-	8.75"/222 mm	10"/254 mm	10.9"/276 mm
L1 Class 300	7.75"/197 mm	-	9.25"/235 mm	10.5"/267 mm	11.5"/292 mm
L1 PN 16/40	6.3"/160 mm	7.1"/180 mm	7.9"/200 mm	9.1"/230 mm	11.4"/290 mm
L2	13.8"/350 mm				
ØD	0.045 to 0.15 psi 3 to 10 mbar	Ø15"/380 mm, A = 100 in²/640 cm²			
	0.075 to 0.45 psi 5 to 30 mbar	Ø11.2"/285 mm, A = 50 in²/320 cm²			
	0.35 to 1.5 psi 25 to 100 mbar	Ø11.2"/285 mm, A = 50 in²/320 cm²			
H	21.25"/540 mm	22.6"/575 mm	22.6"/575 mm	22.6"/575 mm	23.8"/605 mm
H1	6.5"/165 mm	6.5"/165 mm	6.5"/165 mm	6.5"/165 mm	6.5"/165 mm
H3	2.2"/55 mm	2.8"/72 mm	2.8"/72 mm	2.8"/72 mm	3.8"/98 mm
B	8.5"/215 mm	8.6"/225 mm	9.25"/235 mm	9.6"/245 mm	10.2"/260 mm
Weight, approx.	55 lb/25 kg	64 lb/29 kg	71 lb/32 kg	77 lb/35 kg	132 lb/60 kg

Type 2404-1	NPS 3/DN 80	NPS 4/DN 100	-/DN 125	NPS 6/DN 150
L1 Class 150	11.7"/298 mm	13.8"/352 mm	-	17.75"/451 mm
L1 Class 300	12.5"/318 mm	14.5"/368 mm	-	18.6"/473 mm
L1 PN 16/40	12.2"/310 mm	13.8"/350 mm	15.75"/400 mm	18.9"/480 mm
L2	13.8"/350 mm			
ØD	0.045 to 0.15 psi 3 to 10 mbar	Ø15"/380 mm, A = 100 in²/640 cm²		
	0.075 to 0.45 psi 5 to 30 mbar	Ø11.2"/285 mm, A = 50 in²/320 cm²		
	0.35 to 1.5 psi 25 to 100 mbar	Ø11.2"/285 mm, A = 50 in²/320 cm²		
H	24.2"/615 mm	25.2"/640 mm	695 mm/27.4"	28.3"/720 mm
H1	6.1"/155 mm	6.1"/155 mm	155 mm/6.1"	6.1"/155 mm
H3	3.9"/100 mm	4.7"/120 mm	145 mm/5.8"	6.9"/175 mm
B	10.8"/275 mm	11"/280 mm	280 mm/11"	13"/330 mm
Weight, approx.	146 lb/66 kg	165 lb/75 kg	165 lb/75 kg	309 lb/140 kg

Dimensions

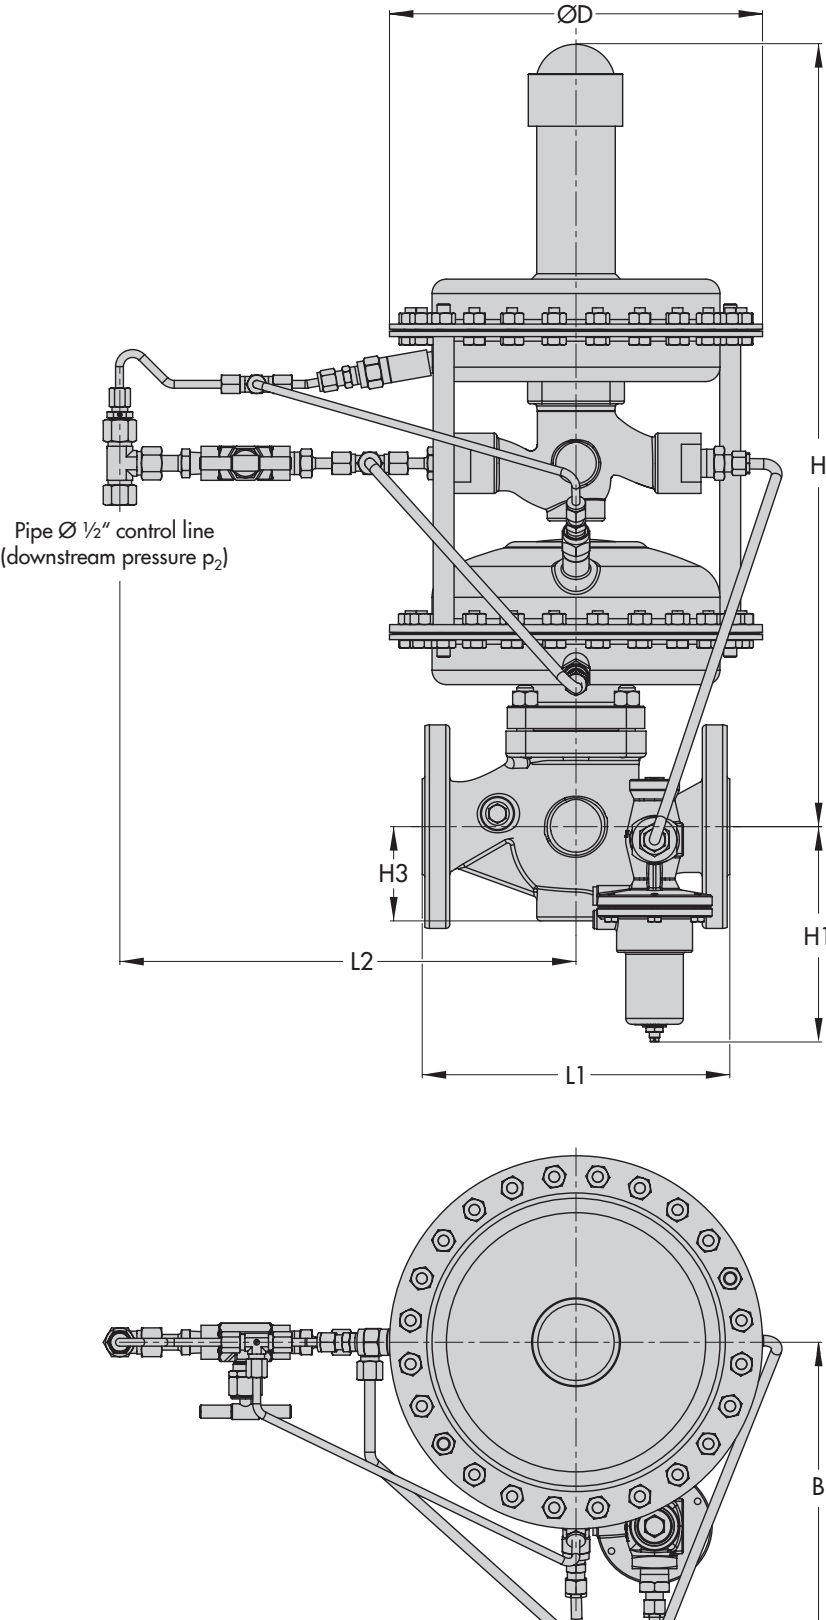


Fig. 3: Dimensions

Installation

The regulator is delivered as a ready-to-install unit.

- Install the main valve in the pipeline at the site of installation and connect the control line (inert gas pressure p_2) to the pilot valve (pipe $\varnothing 1/2"$).



Install the regulator in such a way that it is still easily accessible after the plant is completed to facilitate maintenance or revision work.

Allow enough space for set point adjustment at the pilot valve using a socket wrench.

The following points must be observed:

- Installation in horizontal pipelines
- Install the valve assembly with the pilot valve pointing up
- Direction of flow must correspond with the arrow on the body of the main valve

Refer to ► EB 2538 for more details.

Ordering text

Type 2404-1 Pressure Reducing Valve consisting of:

Type 2406 as main valve, valve body material ...

Material: diaphragm ..., plug seal ...

NPS (DN) ..., C_v (K_{vs}) coefficient ...

Type 2405 functioning as a pilot valve

Set point range 0.045 to 0.15 psi · 0.075 to 0.45 psi · 0.35 to 1.5 psi (3 to 10 mbar · 5 to 30 mbar · 25 to 100 mbar)

Type 2441 as input pressure regulator, mounting kit M2404-1

Specifications subject to change without notice



SAMSON AG · MESS- UND REGELTECHNIK
Weismüllerstraße 3 · 60314 Frankfurt am Main, Germany
Phone: +49 69 4009-0 · Fax: +49 69 4009-1507
samson@samson.de · www.samson.de

T 2538 EN

2017-08-11 · English