

Application

Communication over TCP/IP network (internet/intranet) with TROVIS 5400 and 5500 Automation Systems as well as the TROVIS 6495-2 Industrial Controller



The web module allows the visualization of data from smart controllers in the TROVIS 5400 and 5500 Automation Systems as well as the TROVIS 6495-2 Industrial Controller using the TCP/IP protocol. The plant schematics, relevant control parameters and time schedules of a connected controller can be viewed in a web browser.

Data from connected controllers are saved cyclically in the web module and can be displayed as trend graphs. An alarm management handles incoming fault alarms and sends event-triggered e-mails to max. four e-mail addresses.

Communication to Modbus devices is established either over RS-232 or RS-485 (2-wire/4-wire). There are two Modbus communications interfaces to allow two controllers to communicate with the web module over the RS-232 interface or a group of controllers to communicate with the web module over the RS-485 interface and an additional controller to communicate with the web module over the RS-232 interface. The number of controllers that can be connected is restricted by the maximum number of plant schematics (4) and the number of maximum data points (256).

Special features

- Visualization and operation using a web browser
- Data logging (trend graphs and function to export data as CSV files)
- Alarm management including e-mail notification
- Four configurable user levels
- High password security (MD5 transmission)
- Ethernet interface 10/100 Mbit
- RS-232 for configuration
- RS-232, RS-485 (2-wire/4-wire) Modbus RTU
- 5573, TTL connection to individual controllers, e.g. TROVIS 5573 or 5578
- Processing of max. six heat meters
- Dynamic DNS-supported internet connection
- LEDs for Power, TxD, RxD, 5573
- Mounting on a 35 mm top-hat rail according to DIN EN 50022
- Voltage supply 230 V AC, 50/60 Hz



Fig. 1: TROVIS 5590 Web Module

The web module editor software tool is used to create applications for the web module. This tool allows users to configure all functions over intranet/internet and, for example, to alter user access rights and e-mail addresses.

Technical data

Interfaces	
Serial interfaces	RS-232 TTL (maximum cable length: 1 m) M-Bus using screw terminal (plug-type) RS-232 or RS-485 (2-wire/4-wire)
Ethernet interface	LAN connection 10/100 MBit
Voltage supply	230 V AC, 50 Hz, max. 3 VA using screw terminals
Transmission rate	2400, 4800, 9600, 19200 bit/s
Terminals	Max. 2.5 mm ² or 2 x 1.0 mm ² wire cross-section
LEDs	Status indication Send and receive data (controller and control station) over TTL connection LAN
Permissible ambient temperature	Operation: 0 to 50 °C Storage and transport: -10 to 60 °C
Degree of protection	IP 20 according to IEC 60529
Class of protection	II according to VDE 0106
Degree of contamination	2 according to VDE 0110
Overvoltage category	II according to VDE 0110
Humidity rating	F according to VDE 40040
Noise immunity	According to EN 61000-6-1
Noise emission	According to EN 61000-6-3
Housing	Plastic
Weight	Approx. 0.15 kg
Compliance	CE EAC

Ordering text

TROVIS 5590 Web Module

Scope of delivery

TROVIS 5590 Web Module with RS-232 communication cable

Cable for connection over TTL, e.g. to TROVIS 5573 or 5578


Accessories

- Web Module Editor software Configuration ID 2559750
- RS-232 communication cable, 1 meter 1400-9958
- RS-485 communication cable, 1 Meter 1400-9959
- RS-232 configuration cable, 1 meter 1400-9957 (enables communication settings to be read without TCP/IP access)

Mounting

Mounting on a 35 mm top-hat rail according to DIN EN 50022

Dimensions in mm

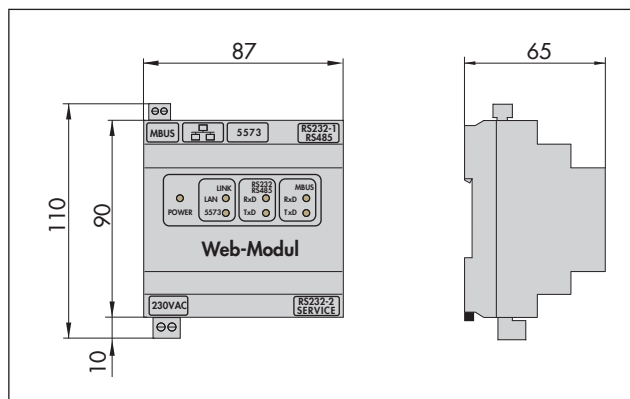

Specifications subject to change without notice



SAMSON AG · MESS- UND REGELTECHNIK
Weismüllerstraße 3 · 60314 Frankfurt am Main, Germany
Phone: +49 69 4009-0 · Fax: +49 69 4009-1507
samson@samson.de · www.samson.de

T 5590 EN

2015-12-11 · English