

The SAMSON logo consists of the word "SAMSON" in white, uppercase, sans-serif font, centered within a solid black circle.

SAMSON




Smart and Powerful for Energy-saving Networks

Type 3374 and Type 3375

Electric Actuators with smart positioners

- Selectable actuator control and process control
- Easy to start up
- Convenient to operate
- Various diagnostic functions
- Optional RS-485 interface

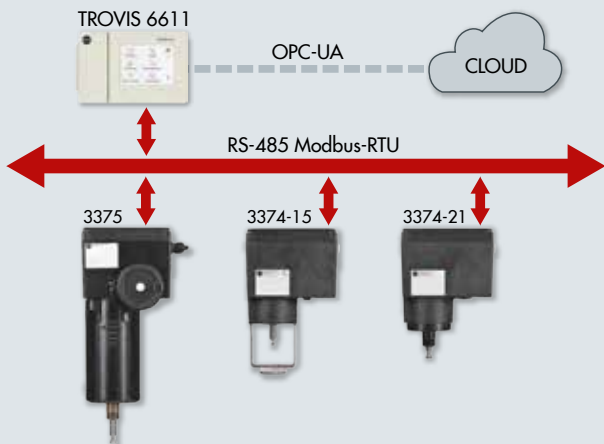

Electric actuator		Type 3374	Type 3375
Rated travel		15 or 30 mm	30 or 60 mm
Stroking speed		0.25 or 0.5 mm/s	0.6 mm/s
Thrust		2 to 2.5 kN	12.5 kN
Torque-dependent limit switches		For both end positions	For both end positions
Power supply		24 V AC/DC or 85 to 264 V AC	230 V AC
Degree of protection		IP 65 with cable glands (otherwise IP 54)	IP 65 with cable glands (otherwise IP 54)
Actuators can be combined with valve models	Type 3251		DN 15 to 100 (see Data Sheet T 8332)
	Type 3256		DN 15 to 100 (see Data Sheet T 8332)
	Type 3241	DN 15 to 150 (see Data Sheet T 5870)	DN 100 to 150 (see Data Sheet T 5870)
	Type 3244	DN 15 to 150 (see Data Sheet T 5870)	DN 100 to 150 (see Data Sheet T 5870)
	Type 3260	DN 65 to 150 (see Data Sheet T 5861)	DN 200 to 300 (see Data Sheet T 5861)
	Type 3214	DN 65 to 250 (see Data Sheet T 5868)	DN 300 to 400 (see Data Sheet T 5868-1)
	Type 3321	DN 15 to 100 (see Data Sheet T 8111)	
	Type 3323	DN 15 to 100 (see Data Sheet T 8113)	
	Type 3531	DN 15 to 80 (see Data Sheet T 8131)	
	Type 3535	DN 15 to 80 (see Data Sheet T 8135)	
Options		 <p> <ul style="list-style-type: none"> ▪ Mechanical or electronic limit contacts ▪ RS-485 interface for Modbus-RTU communication ▪ Free TROVIS-VIEW software for configuration and operation See Data Sheet T 6661 for accessories) </p>	